

544,091

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number
WO 2004/082522 A2

- (51) International Patent Classification⁷: **A61F**
- (21) International Application Number:
PCT/US2004/002497
- (22) International Filing Date: 29 January 2004 (29.01.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/444,510 31 January 2003 (31.01.2003) US
- (71) Applicant and
(72) Inventor (for all designated States except US): **MURRAY, Ian, P.** [US/US]; 14351 Hampshire Knob Drive, Phoenix, MD 21131 (US).
- (74) Agent: **BLOOM, Leonard**; Armstrong, Kratz, Quintos, Hanson & Brooks, LLP, 502 Washington Avenue, Suite 220, Towson, MD 21204 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: MULTI-AXIAL POSITIONING SYSTEM FOR A SURGICALLY-IMPLANTED SPINAL SUPPORT

(57) Abstract: A surgically-implanted spinal support having at least one screw embedded in the bone of the patient's spinal column. Clamps held between yokes (washers) mounted on the screw and secured by a nut. A rod received in slots in the clamps. The end connecting spaced-apart screws. A method of use is disclosed.

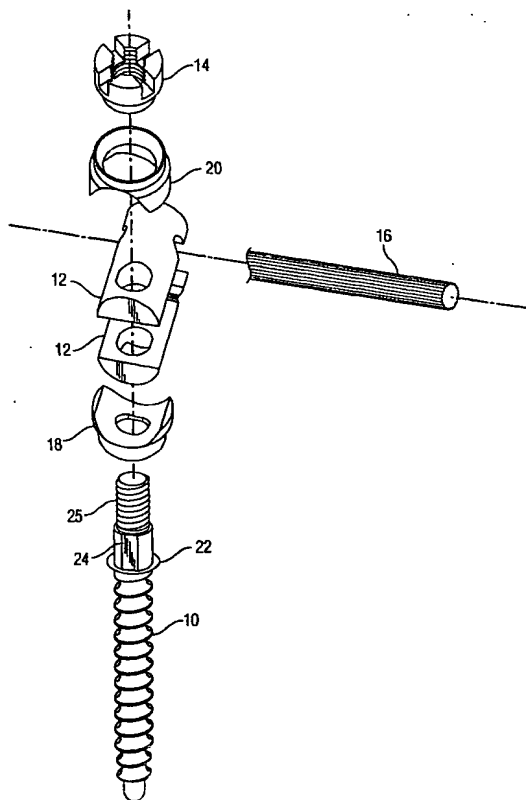

WO 2004/082522 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.